


D


C

B


USB

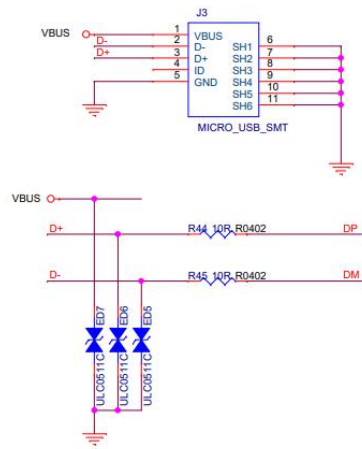


UART

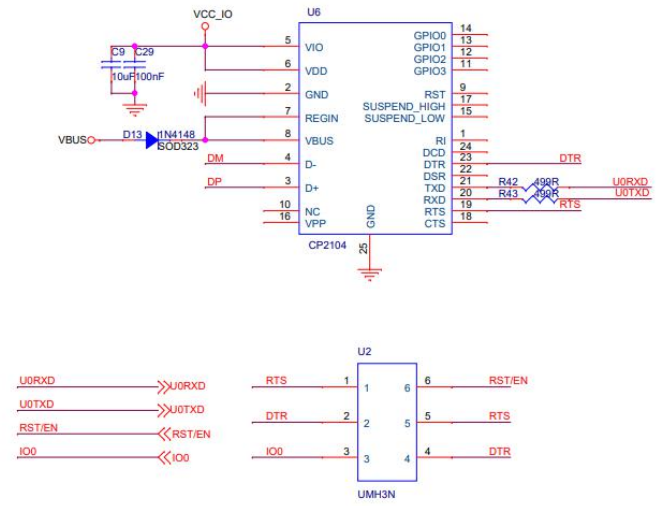




RST



SR1206 PCB Footprint show as below
Add pin3, pin4 superposed on normal R1206 Footprint pin1, pin2
to make sure the signal is sensed from resistor PAD directly

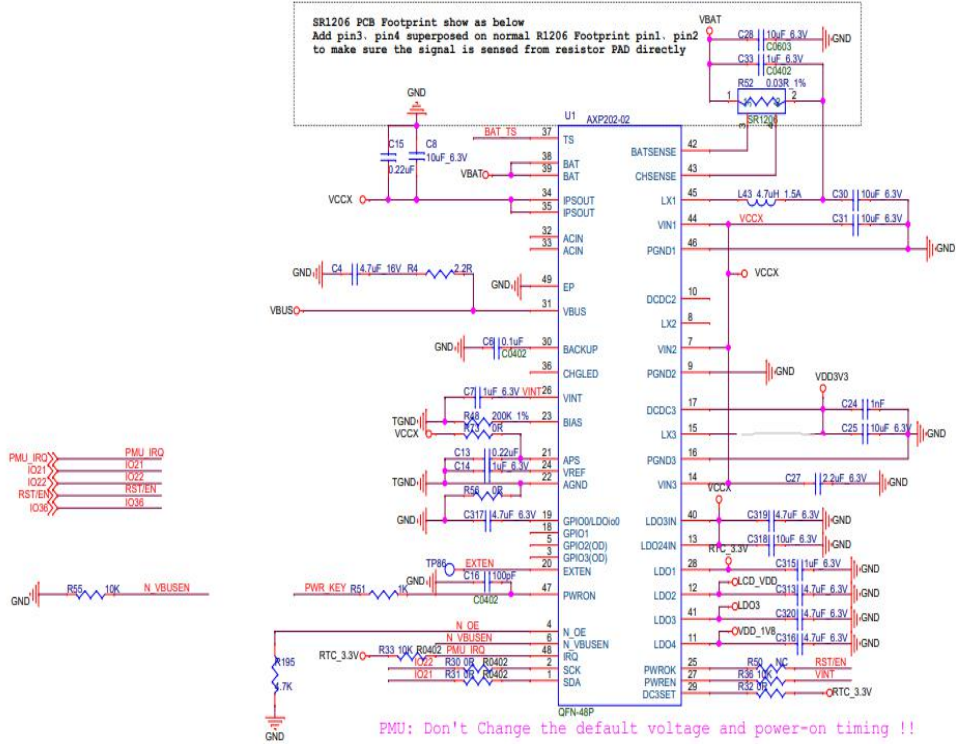



PMU: Don't Change the default voltage and power-on timing !!




File	T_WATCH-2021-PSRAM
Size	Document Number
B	AXP202

ESP32 Module:with 1.8V Flash & SRAM
The operating voltage for signals marked in blue is 1.8V.

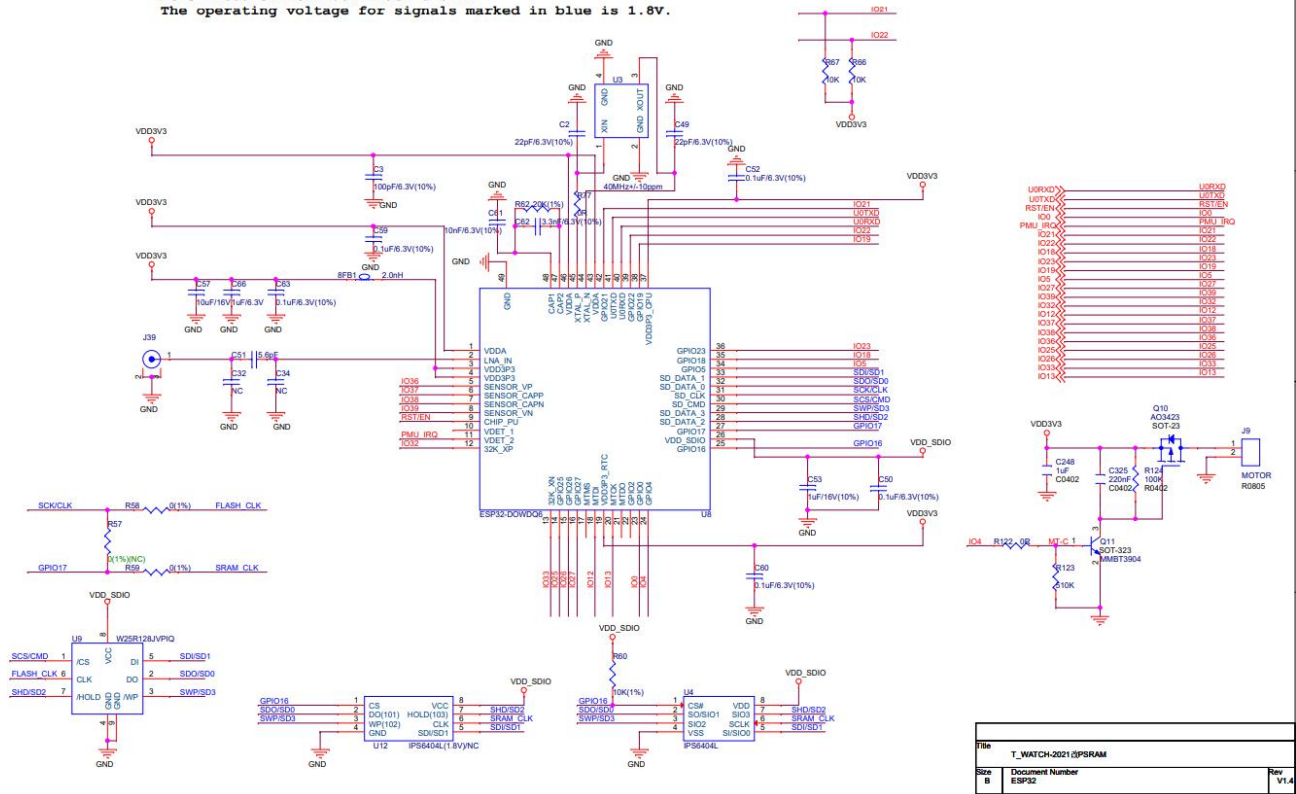


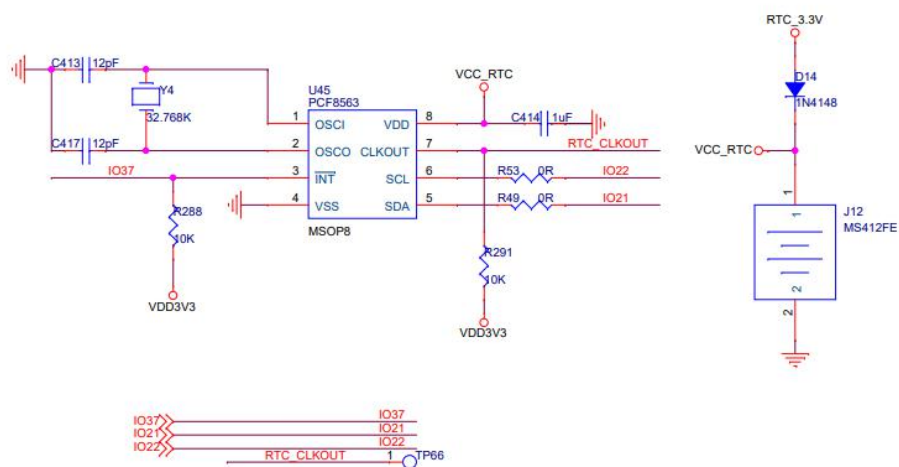

Title		
T_WATCH-2021或PSRAM		
Size	Document Number	Rev
A	RTC	V1.4
Date:	Wednesday, July 01, 2020	Sheet 4 of 6

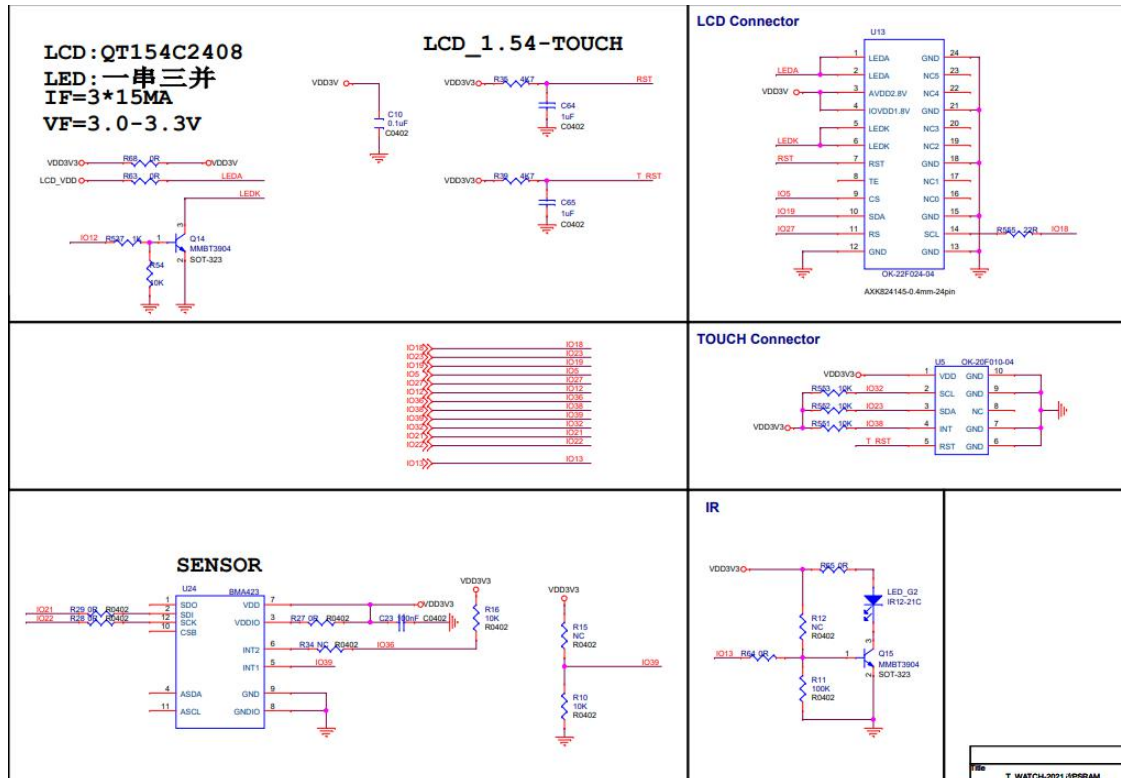

File	T_WATCH-2021 (SPSRAM)
Size	Document Number
B	LCD

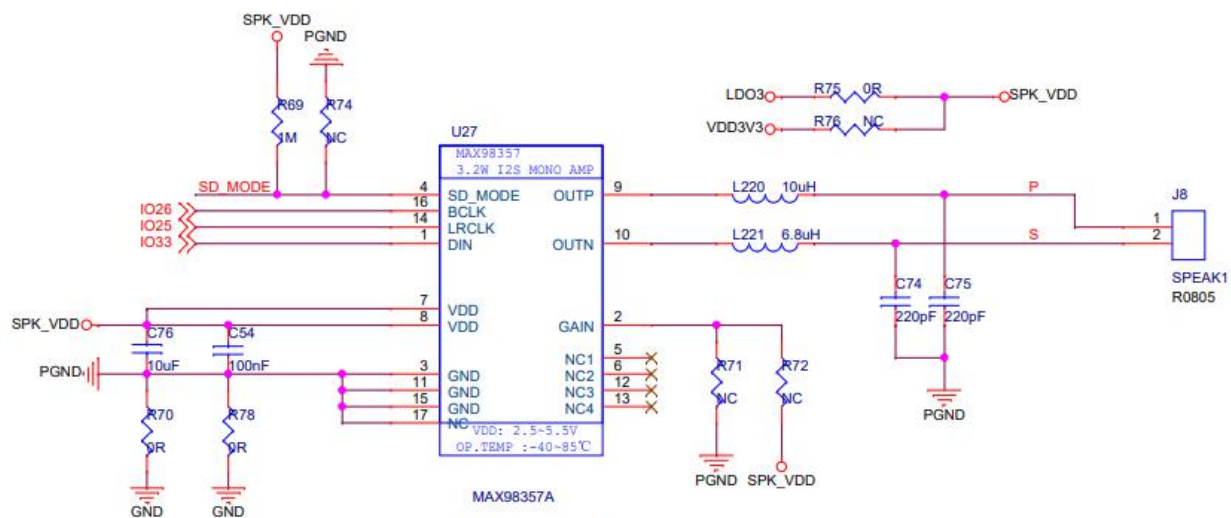

Min: 3mA
Max: 120mA

